


NVR-104MH-B SERIES NVR



Key Features

- Dual-OS design to ensure high reliability of system running
- ANR technology to enhance the storage reliability when the network is disconnected
- H.265/H.264/H.264+ video formats
- Connectable to the third-party network cameras
- Up to 16 IP cameras can be connected
- Recording at up to 8 MP resolution
- Supports live view, storage, and playback of the connected camera at up to 8 MP resolution
- HDMI/VGA outputs provided
- HDMI Video output at up to 4K (3840 × 2160) resolution
- 1 SATA interface connectable for recording and backup
- Storage space effectively saved by 75% with the use of H.265+ decoding format
- 1 self-adaptive 10M/100Mbps network interface
- VCA detection alarm is supported
- Smart search for the selected area in the video; and smart playback to improve the playback efficiency
- Hik-Connect for easy network management

Dimensions

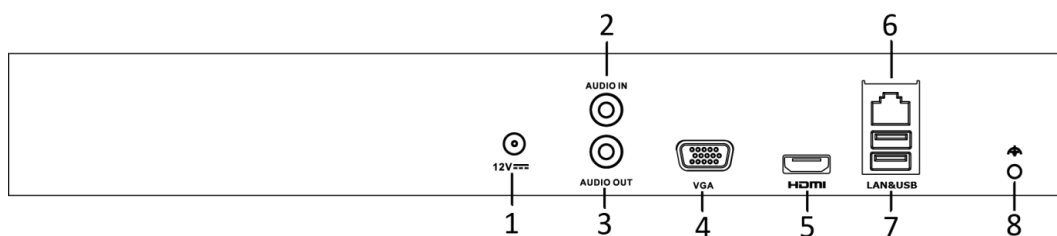

Index	Description	Index	Description
1	Power Supply	5	HDMI Interface
2	Audio In	6	LAN Network Interface
3	Audio Out	7	USB Interface
4	VGA Interface	8	Ground

Model	NVR-104MH-B	
Video/ Audio input	IP video input	4-ch
	Incoming bandwidth	40 Mbps
	Outgoing bandwidth	80 Mbps
Video/ Audio output	HDMI/VGA output resolution	HDMI: 4K (3840 × 2160)/30Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
		VGA: 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
	Audio output	1-ch, RCA (Linear, 1 KΩ)
Decoding	Decoding format	H.265/H.264/H.264+/H.265+
	Recording resolution	6MP/5MP/4MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF
	Synchronous playback	4-ch
	Capability	4-ch @1080p
Network management	Network protocols	TCP/IP, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, SMTP, NFS, iSCSI, UPnP™, HTTPS
Hard disk	SATA	1 SATA interface for 1HDD
	Capacity	Up to 6TB capacity for each disk
External interface	Two-way audio	1-ch, RCA (2.0 Vp-p, 1kΩ)
	Network interface	1 RJ-45 10 M/100 Mbps self-adaptive Ethernet interface
	USB interface	2 × USB 2.0
General	Power supply	12 VDC
	Consumption (without hard disk)	≤ 10 W
	Working temperature	-10 °C to +55 °C (14 °F to 131 °F)
	Working humidity	10 to 90 %
	Chassis	260 mm chassis
	Dimensions (W × D × H)	260 × 225 × 48 mm (10.2" × 8.9" × 1.9")
	Weight (without hard disk)	≤ 1 kg (2.2 lb)

Available Models

NVR-104MH-B